



CHINMORE INDUSTRY CO.,LTD

Specification

1. Cable Assembly with RF Connector
2. *Chinmore's* No: CX-SMA174SMA-1509
3. Frequency: 1~3 GHz
4. VSWR: 2.0:1
5. Cable: RG-174 150mm
6. Connector: SMA (M) ST & SMA F(BH)

✧RoHS Compliant

✧ISO 9001 & ISO 14001


Cable	RG174/UK(大脚)	<div style="border: 1px solid black; padding: 5px; display: inline-block;"> ROHS ISO 9001 ISO 14001 </div>
OD	ø2.7±0.15mm	
Cover	Black	
SMA M	Gold(鍍金)	
SMA(BH)F	Gold(鍍金)	

Material:	Treatment:	竣茂工業有限公司 Chinmore Industry CO.,LTD			
Design	Approv	Tolerance	Unit: mm	Symbol	TITLE
陳俊斌	陳文斌	X=±0.5 Y=±0.2 Z=±0.1 XXX=±0.05	mm	⊕	SMA M+174U+SMA(BH)F
Ver: A	Scale 1:1	Model NO	File NO: QR0402	Drawing NO	100-23005-00240

Part NO	CX-SMA174SMA-1509	MATERIAL	QTY	DESCRIPTION
---------	-------------------	----------	-----	-------------

Frequency (MHz)	VSWR	Insertion Loss(dB)
1000 MHz	1.06	-1.10
2000 MHz	1.08	-1.66
3000 MHz	1.47	-2.48

Test Report

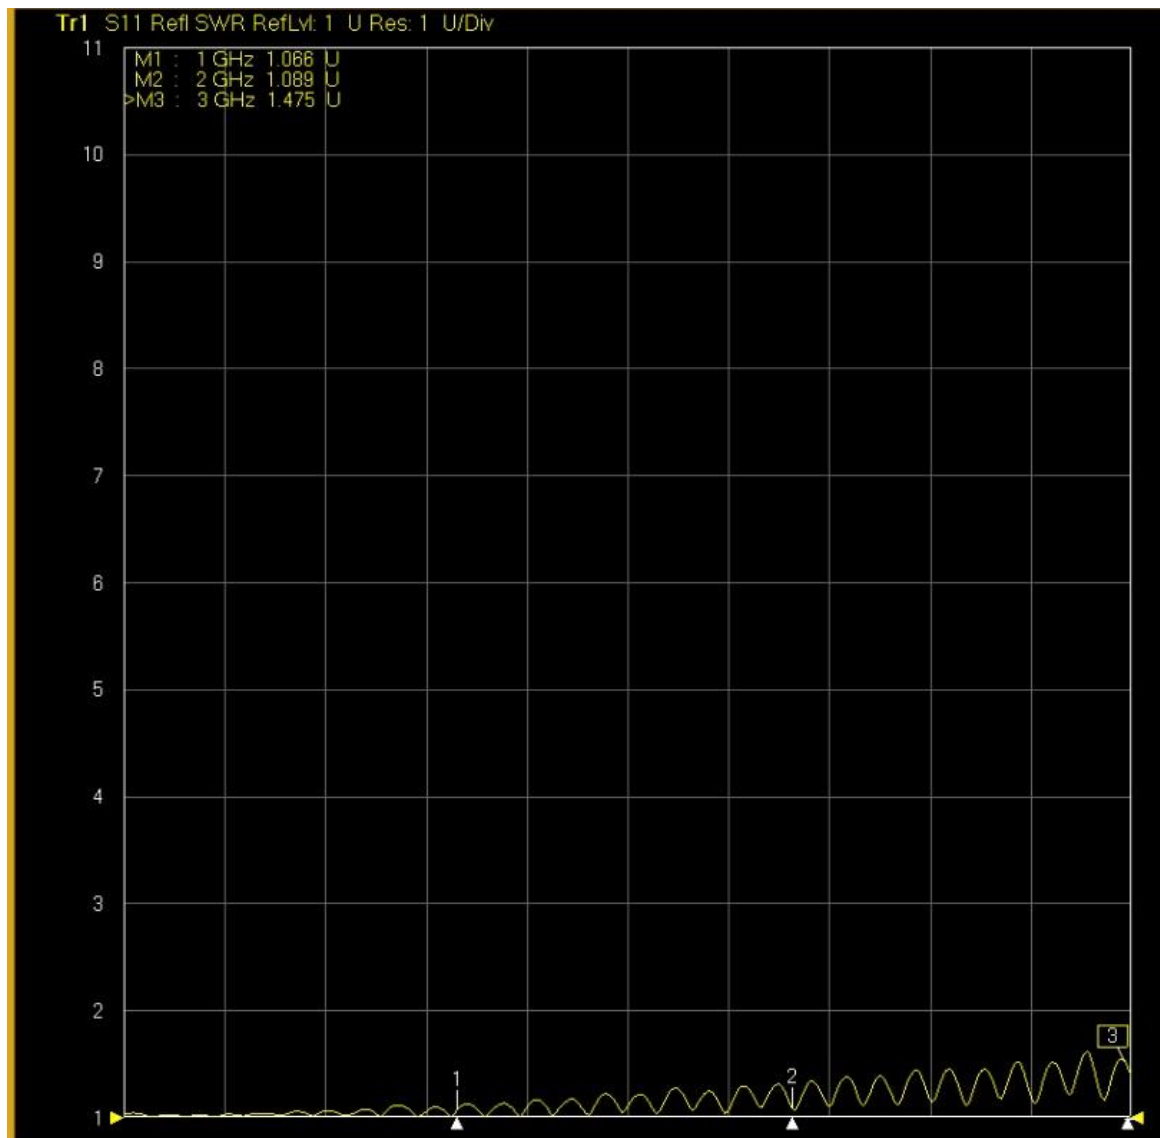

▶ **IT2** S21 Trans Load RefLvl: 0 dB Res: 10 dB/Div

