



CHINMORE INDUSTRY CO.,LTD

Specification

1. Mini Coaxial Cable Assembly
2. *Chinmore's* No: XX-MHF113MHF-619
3. Frequency: 600MHz~3GHz
4. VSWR: 2.0:1
5. Cable: $\varnothing 1.13$ 200mm
6. Connector: MHF(IPX)

✧RoHS Compliant

✧ISO 9001 & ISO 14001

| | | |
|----------|---------------------------------------|---|
| OD | $\varnothing 1.13 \pm 0.02 \text{mm}$ | <div style="border: 1px solid black; padding: 5px; display: inline-block;"> ROHS ISO 9001 ISO 14001 </div> |
| Cover | Grey(灰) | |
| MHF(IPX) | GOLD(鍍金) | |

MHF(IPX) MHF(IPX)

2.1 2.1

5.5 5.5


200±10

| | | | | | | | |
|-----------|--------|------------|------------|------------------------------------|---------------|------------|--------------------------------|
| Material: | | Treatment: | | 竣茂工業有限公司 Chinmore Industry CO.,LTD | | | |
| Drawer | Design | Approv | Tolerance | Unit: | \varnothing | TITLE | MHF+ $\varnothing 1.13$ 鍍料+MHF |
| | | 工程 | ± 0.1 | mm | | | |
| | | 磁石 | ± 0.05 | Ver: A | Scale 1:1 | Model NO | 118008218 |
| | | 蔡文壽 | ± 0.02 | File NO: QR0402 | | Drawing NO | 100-22037-0471 |

| NO | DESCRIPTION | MATERIAL | Q'TY |
|---------|------------------|----------|------|
| Part NO | XX-MHF113MHF-619 | | |

| Frequency (MHz) | VSWR | Insertion Loss (dB) |
|-----------------|------|---------------------|
| 600 | 1.15 | -0.52 |
| 1000 | 1.08 | -0.71 |
| 1500 | 1.13 | -0.95 |
| 1800 | 1.19 | -1.18 |
| 2000 | 1.15 | -1.24 |
| 2100 | 1.23 | -1.27 |
| 2400 | 1.11 | -1.48 |
| 2700 | 1.20 | -1.38 |
| 3000 | 1.41 | -2.08 |

Test Report

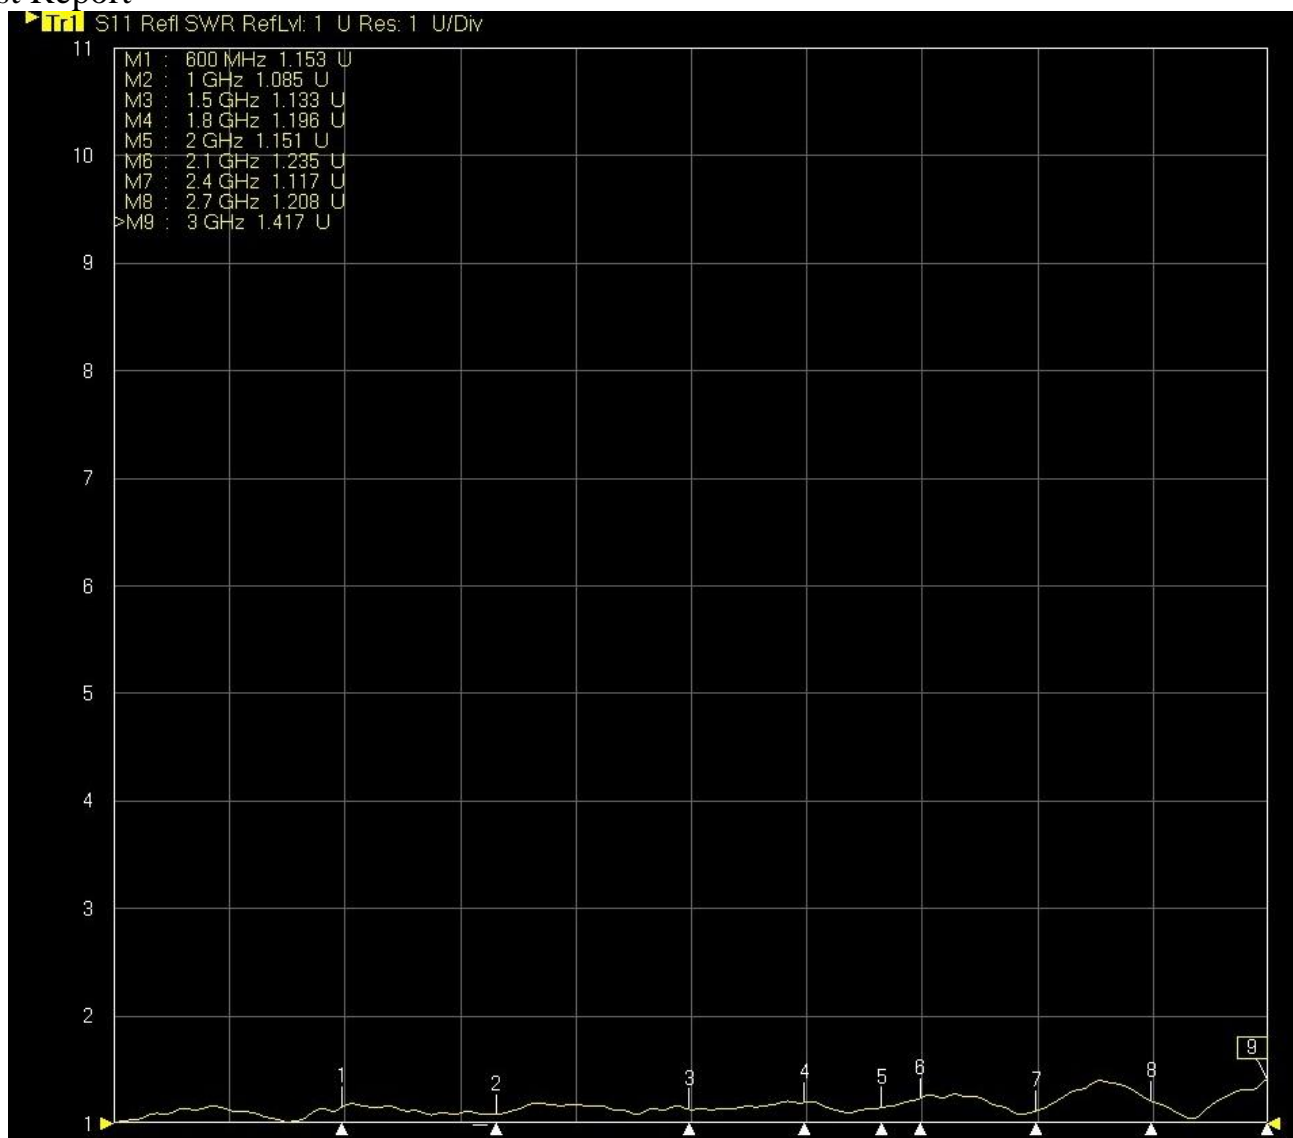

Tr2 S21 Trans LogM RefLvl: 0 dB Res: 10 dB/Div

