



CHINMORE INDUSTRY CO.,LTD

Specification

1. Cable Assembly with RF Connector
2. *Chinmore's* No: CX-MMCX316SMA-1476
3. Frequency: 1~3GHz
4. VSWR: 2.0:1
5. Cable: RG-316 120mm
6. Connector: RA MMCX M & SMA F Bulkhead Straight

✧RoHS Compliant


✧ISO 9001 & ISO 14001

Cable	RG316/U	<div style="border: 1px solid black; padding: 5px; display: inline-block;"> ROHS ISO 9001 ISO 14001 </div>
OD	∅2.5±0.1mm	
Cover	Brown	
MMCX 90° M	Gold(鍍金)	
SMA(BH)F-A(鍍H)	Gold(鍍金)	

Material:		Treatment:		竣茂工業有限公司 Chinmore Industry CO .LTD			
Drawer	Design	Approv	Tolerance	Unit:	mm	TITLE	MMCX 90° M+316U+ SMA(BH)F A(鍍H)
			X=±0.5	Ver:	A	Scale 1:1	Model NO
			X=±0.2	File NO:	QR0402	Drawing NO	100-23005-0235
			X=±0.1				
			XX=±0.05				

Frequency (MHz)	VSWR	Insertion Loss (dB)
1000 MHz	1.26	-0.39
2000 MHz	1.51	-0.63
3000 MHz	1.65	-0.98

TEST Report

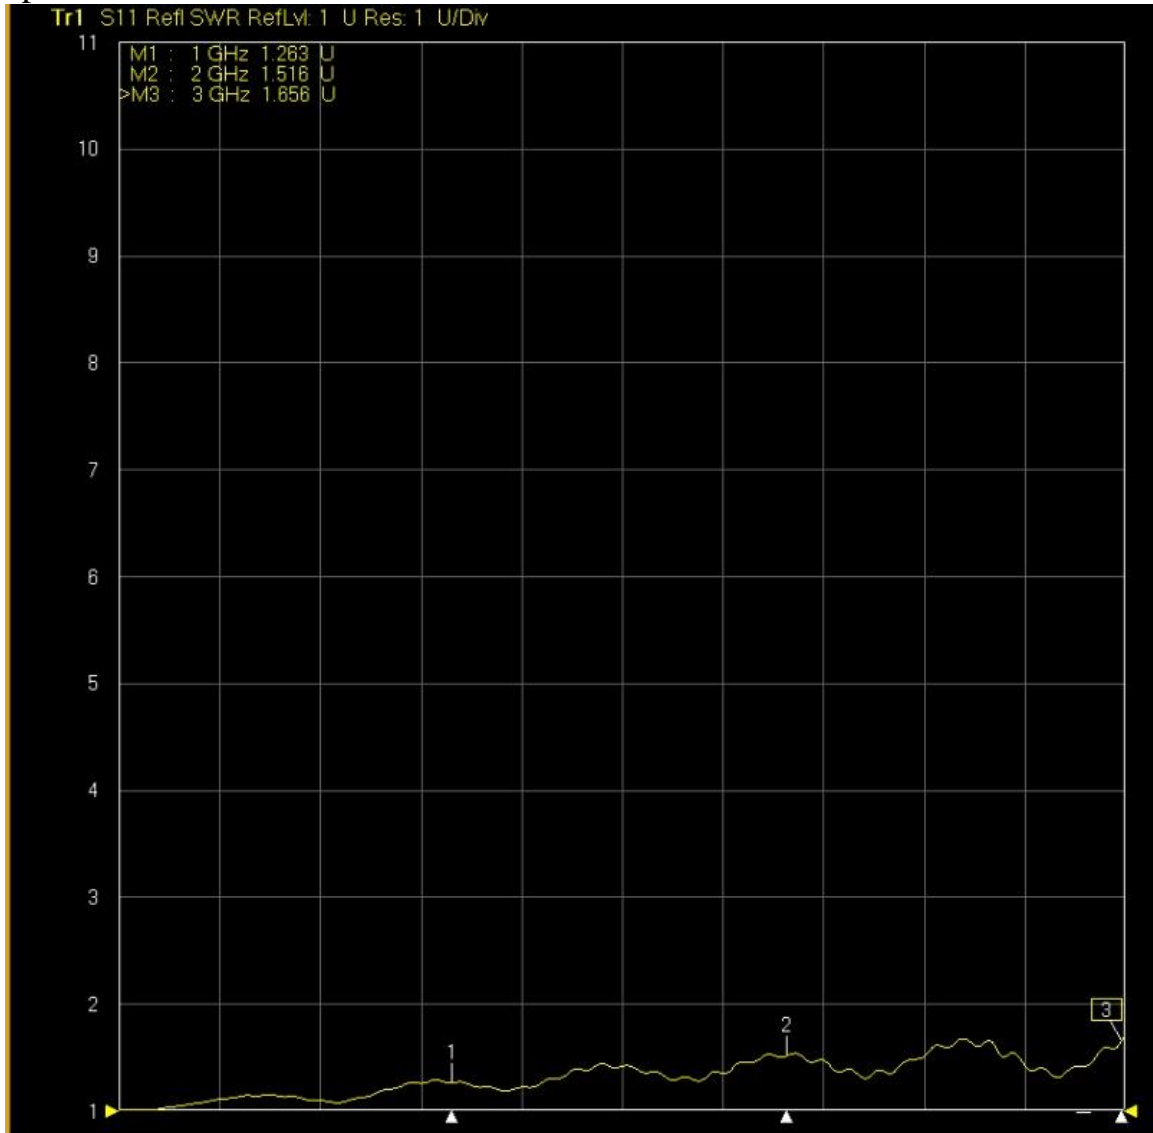

► **Tr2** S21 Trans LodM RefLvl: 0 dB Res: 10 dB/Div

