



CHINMORE INDUSTRY CO.,LTD

Specification

1. Cable Assembly with RF Connector
2. *Chinmore's* No: CX-MMCX174FME-1519
3. Frequency: 1~3GHz
4. VSWR: 2.0:1
5. Cable: RG-174 400mm
6. Connector: FME M(BH) & RA MMCX M

✧RoHS Compliant


✧ISO 9001 & ISO 14001

Cable	RG174/U	<div style="border: 1px solid black; padding: 5px; display: inline-block;"> ROHS ISO 9001 ISO 14001 </div>
OD	∅2.7±0.15mm	
Cover	Black	
MMCX 90° M	Gold(鍍金)	
FME(BH)M	Ni(鍍鎳)	

Material:		Treatment:		竣茂工業有限公司 Chinmore Industry CO.,LTD			
Drawer	Design	Apprv	Tolerance	Unit: mm		TITLE	MMCX 90° M+174U+FME(BH)M
				Ver: A	Scale 1:1	Model NO	WIREAC1681
Part NO		CX-MMCX174FME-1519		File NO:	QR0402	Drawing NO	100-23005-217

Frequency (MHz)	VSWR	Insertion Loss (dB)
1000	1.58	-0.50
2000	1.85	-0.94
3000	1.76	-1.11

TEST Report

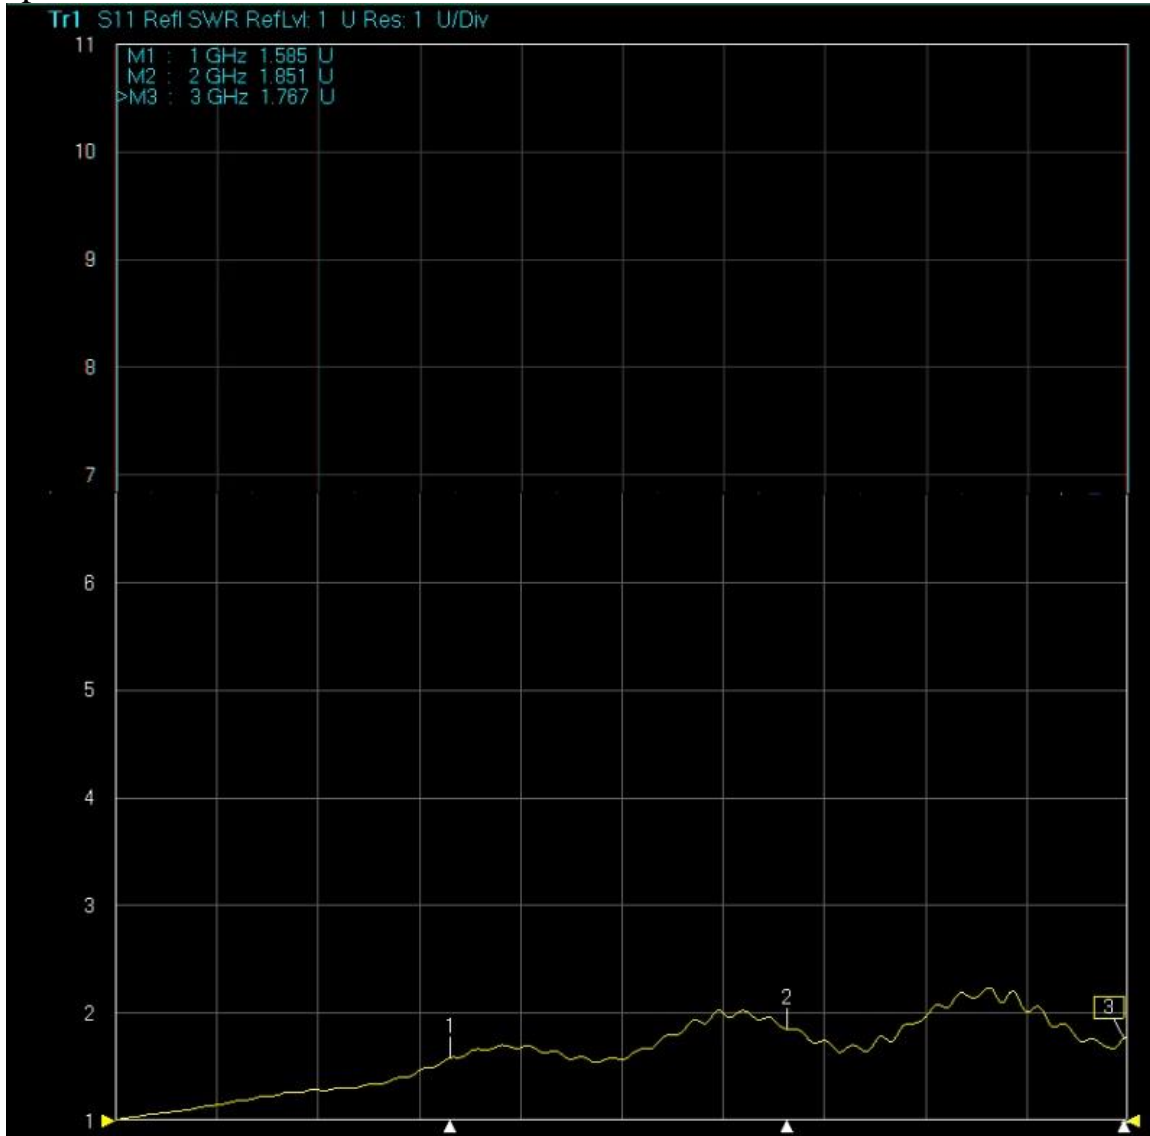

S21 Trans LogM RefLvl: 0 dB Res: 10 dB/Div

