



CHINMORE INDUSTRY CO.,LTD

Specification

1. Mini Coaxial Cable Assembly with RF Connector
2. *Chinmore's* No: CX-MMCX113SMA-809
3. Frequency: 600MHZ~3GHz
4. VSWR: 2.0:1
5. Cable: $\varnothing 1.13$ 85mm
6. Connector: RA MMCX M & SMA F P.C.B

✧ *RoHS Compliant*

✧ *ISO 9001 & ISO 14001*


OD	$\varnothing 1.13 \pm 0.05 \text{mm}$	<div style="border: 1px solid black; padding: 5px; display: inline-block;"> ROHS ISO 9001 ISO 14001 </div>
Cover	Grey(灰)	
MMCX 90° M	Gold(鍍金)	
SMA F P.C.B	Gold(鍍金)	

注意：MMCX方向需與SMA腳座同方向

Material:		Treatment:		竣茂工業有限公司 Chinmore Industry CO .LTD			
Drawer:	Design:	Approval:	Tolerance:	Unit:	Symbol:	TITLE:	MMCX 90° M+1.13線材+ SMA F P.C.B
			X=±0.5	mm			
			X=±0.2	Ver: B	Scale 1:1	Model NO:	WIREAC1197
			XX=±0.1	File NO: QR0402	Drawing NO:	100-23005-106	
			.XXX=±0.05				

Frequency (MHz)	VSWR	Insertion Loss (dB)
600	1.04	-0.25
1000	1.12	-0.32
1500	1.33	-0.47
1800	1.34	-0.50
2000	1.10	-0.50
2100	1.07	-0.48
2400	1.56	-0.86
2700	2.01	-0.72
3000	1.86	-0.75

TEST Report

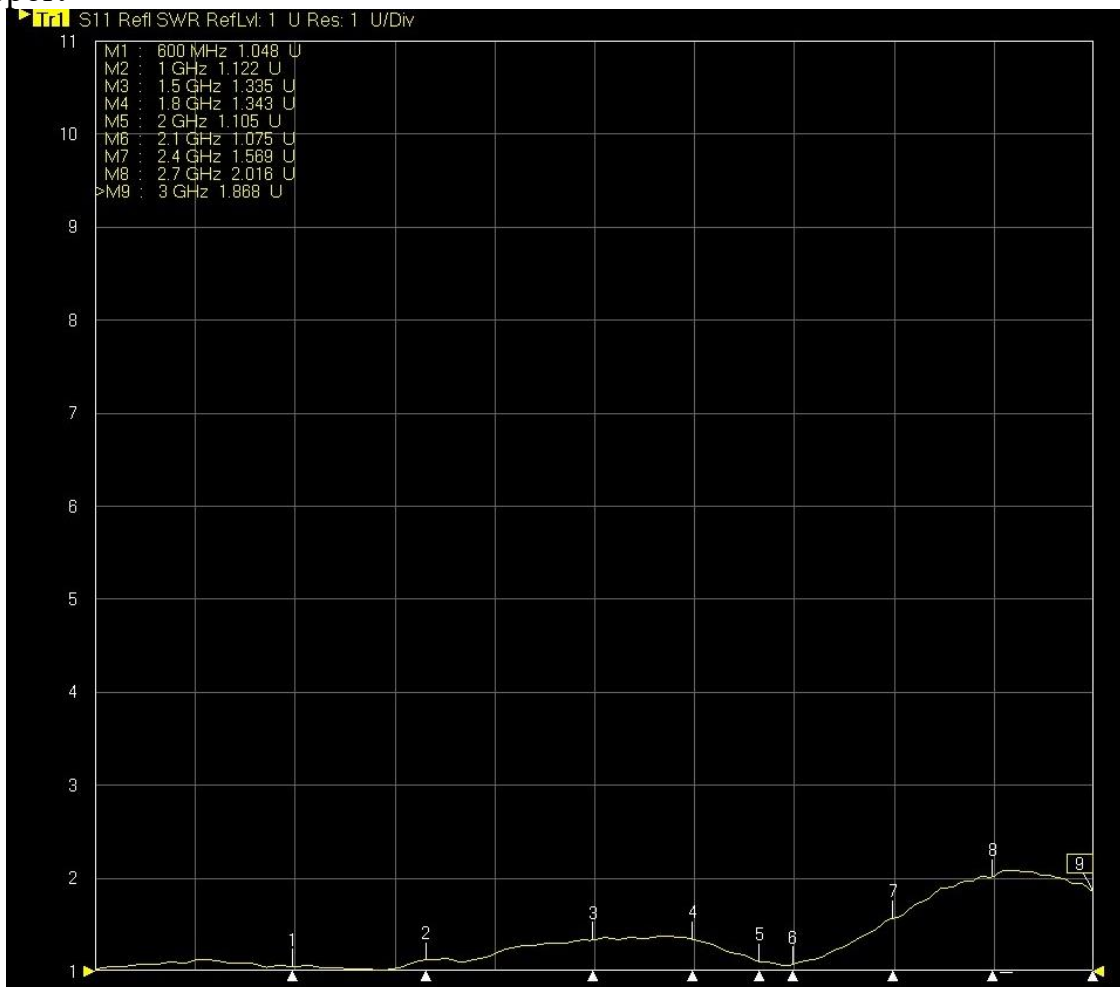

Tr2 S21 Trans LogM RefLvl: 0 dB Res: 10 dB/Div

