



CHINMORE INDUSTRY CO.,LTD

Specification

1. Cable Assembly with RF Connector
2. *Chinmore's* No: CX-FME174MMCX-527
3. Frequency: 600MHZ~3GHz
4. VSWR: 2.0:1
5. Cable: RG-174 200mm
6. Connector: RA MMCX M & FME DTM


✘RoHS Compliant

✘ISO 9001 & ISO 14001

Cable	RG174/U
OD	ø2.7±0.15mm
Cover	Black
MMCX M 90°	Gold (鍍金)
FME DTM	Gold (鍍金)

ROHS


ISO 9001
ISO 14001

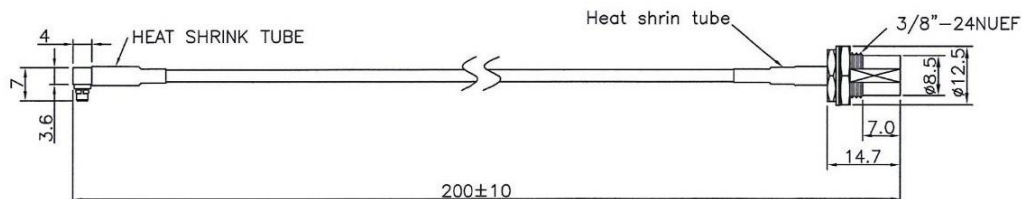

Material:		Treatment:		竣茂工業有限公司 Chinmore Industry CO .LTD			
Drawer	Design	Approval	Tolerance	Unit: mm		TITLE	MMCX M(90°)+174U+FME DTM
NO		DESCRIPTION	MATERIAL	FINISH	Q'TY	Ver: A	Scale 1:1
Part NO		CX-FME174MMCX-527				Model NO	
						File NO: QR0402	Drawing NO 100-23005-031-1

Frequency (MHz)	VSWR	Insertion Loss (dB)
600	1.06	-0.49
1000	1.04	-0.64
1500	1.03	-0.80
1800	1.18	-0.92
2000	1.03	-0.91
2100	1.1	-0.97
2400	1.16	-1.02
2700	1.30	-1.11
3000	1.09	-1.16

Test Report

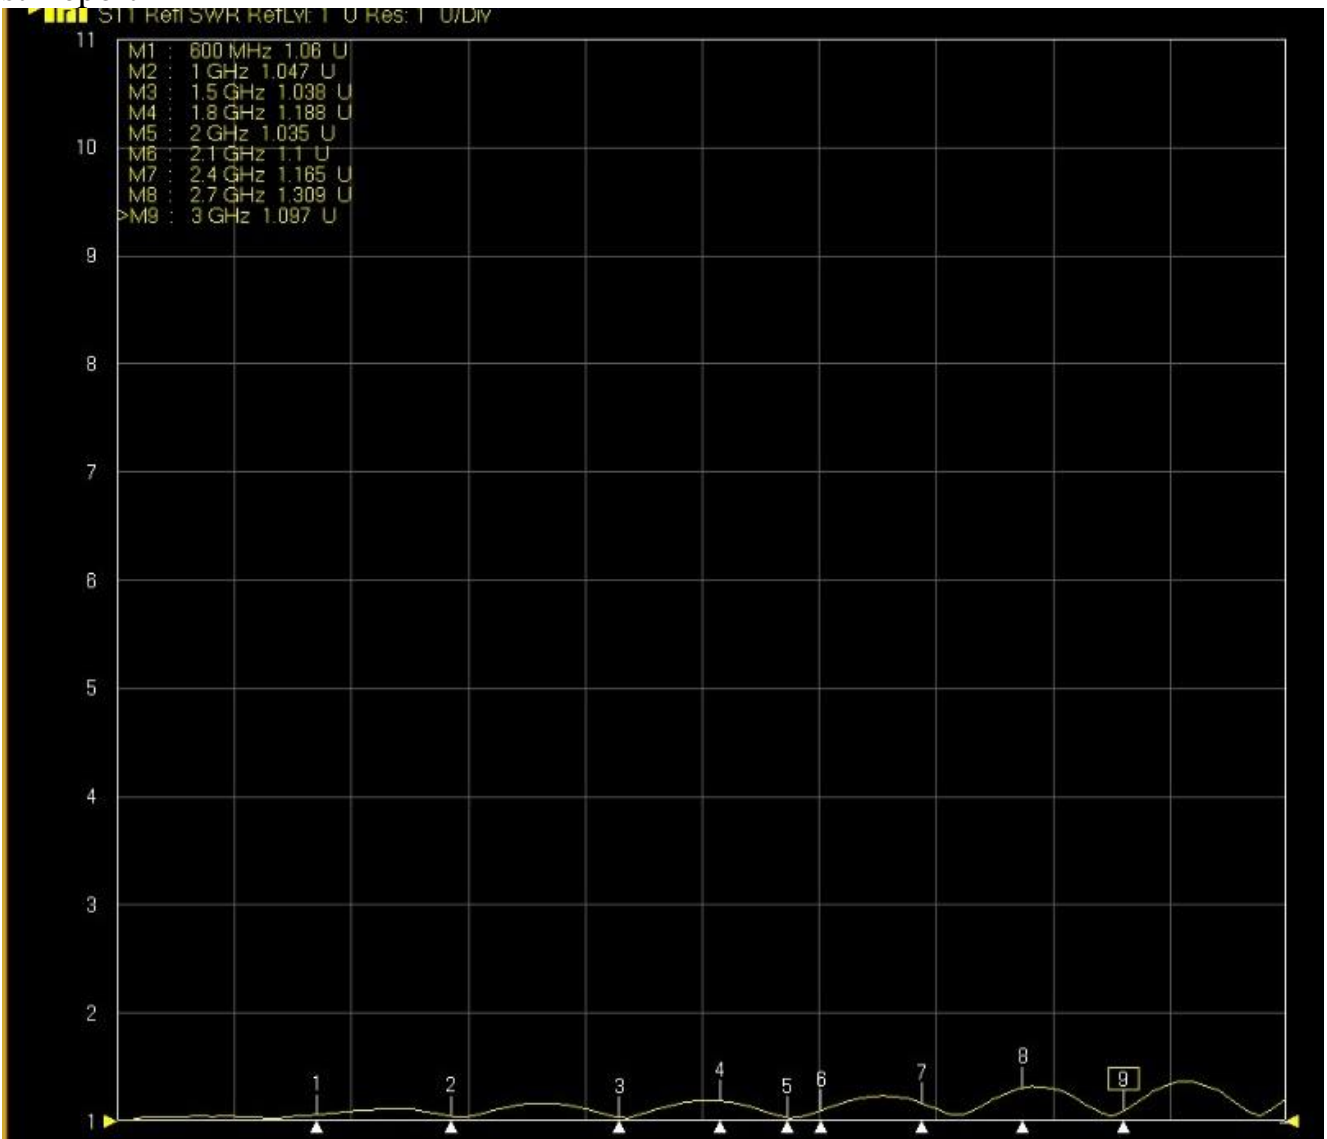

Tr2 S12 Trans LcdM RefLvl: 0 dB Res: 10 dB/Div

