



# CHINMORE INDUSTRY CO.,LTD

## Specification

1. Mini Coaxial Cable Assembly with RF Connector
2. *Chinmore's* No: CX-IPX113SMA-1722
3. Frequency: 600MHz~3GHz
4. VSWR: 2.0:1
5. Cable:  $\varnothing 1.13$  80mm
6. Connector: RP SMA F Bulkhead A Type & U.FL(I.PX)

✧RoHS Compliant

✧ISO 9001 & ISO 14001

Cable	$\varnothing 1.13 \pm 0.02 \text{mm}$	<div style="border: 1px solid black; padding: 5px; display: inline-block;"> <b>ROHS</b>          ISO 9001          ISO 14001       </div>
Cover	Grey (灰色)	
U.FL(I.PX)	Gold (鍍金)	
RP SMA F(BH)A型	Gold (鍍金)	


U.FL(I.PX)

SMA F M PIN(BH)A型  
SMA 母頭公針(BH)A型

Material:		Treatment:		竣茂工業有限公司 Chinmore Industry CO .LTD			
Drawer	Design	Aprov	Tolerance	Unit: mm		TITLE	U.FL(I.PX)+1.13+ RP SMA F(BH)A型
			X=±0.5	Ver: A	Scale 1:1	Model NO	WIREAC1936
			Y=±0.2	File NO: QR0402	Drawing NO	100-23005-0288	
			Z=±0.1				
			XXX=±0.05				

Frequency (MHz)	VSWR	Insertion Loss (dB)
600	1.09	-0.21
1000	1.05	-0.32
1500	1.16	-0.47
1800	1.11	-0.5
2000	1.19	-0.62
2100	1.28	-0.59
2400	1.55	-1.03
2700	1.58	-0.62
3000	1.60	-0.51

### Test Report

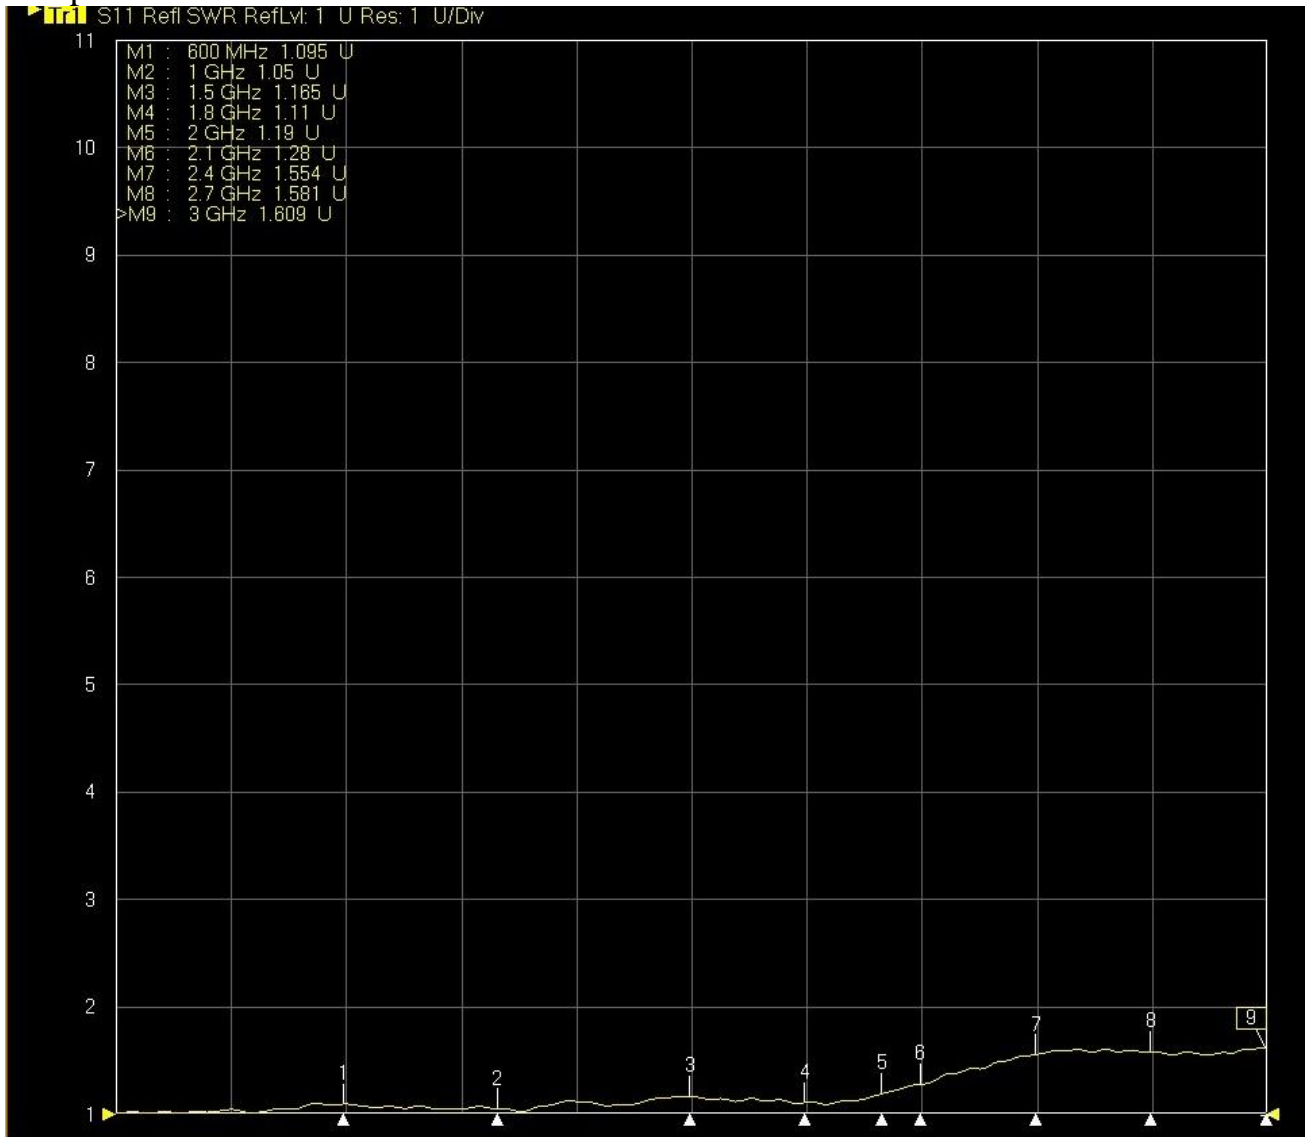

Tr2 S21 Trans Load RefLvl: 0 dB Res: 10 dB/Div

