



CHINMORE INDUSTRY CO.,LTD

Specification

1. Cable Assembly with RF Connector
2. *Chinmore's* No: CX-SMA174SMA-1618
3. Frequency: 600MHZ~3GHz
4. VSWR: 2.0:1
5. Cable: RG-174 1M
6. Connector: RP SMA (M) ST & RP SMA F Bulkhead


✧RoHS Compliant

✧ISO 9001 & ISO 14001

Cable	RG174/U(大同)
OD	∅2.7±0.15mm
Cover	Black (黑)
RP SMA M	Gold (鍍金)
RP SMA F(BH)	Gold (鍍金)

ROHS


ISO 9001
ISO 14001

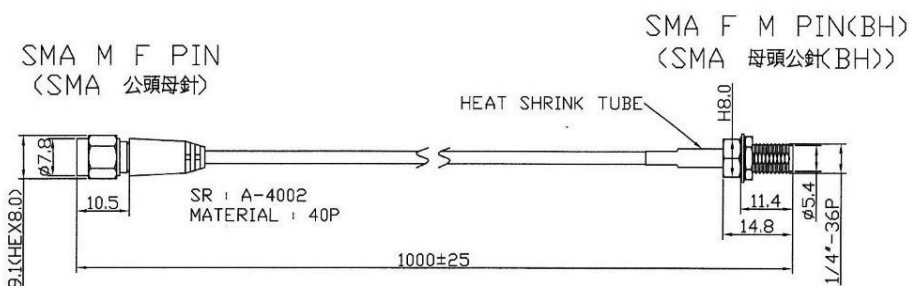

Material:		Treatment:		竣茂工業有限公司 Chinmore Industry CO.,LTD			
Drawer	Design	Approv	Tolerance	Unit:	mm	TITLE	RP SMA M+174U+ RP SMA F(BH)
機搨 圖 3.2 蔡文壽				X=±0.5 X=±0.2 X=±0.1 XXX=±0.05	Ver: A	Scale 1:1	Model NO WIREAC1842
Part NO	CX-SMA174SMA-1618		File NO:	QR0402	Drawing NO	100-23005-0270	

Frequency (MHz)	VSWR	Insertion Loss (dB)
600	1.04	-0.70
900	1.17	-0.89
1575	1.35	-1.28
1800	1.42	-1.47
2000	1.66	-1.64
2100	1.82	-1.81
2400	1.65	-1.80
2700	1.19	-1.87
3000	1.94	-2.21

Test Report

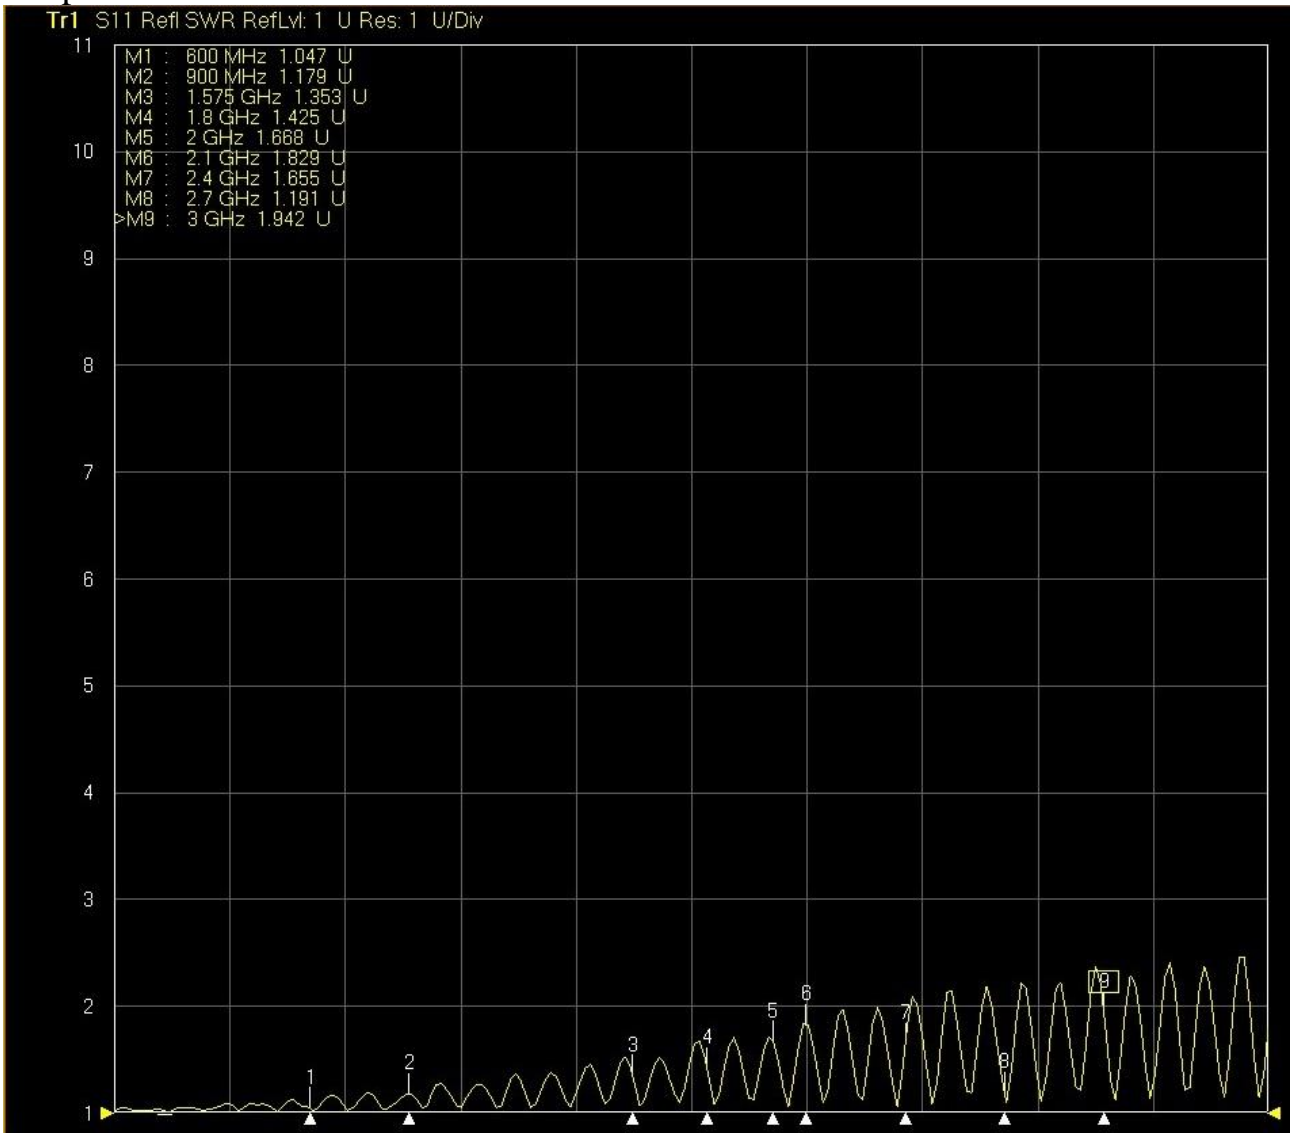

S12 Trans LogM RefLvl: 0 dB Res: 10 dB/Div

