



CHINMORE INDUSTRY CO.,LTD

Specification

1. Cable Assembly with RF Connector
2. *Chinmore's* No: CX-SMA174SMA-1780
3. Frequency: 600MHZ~3GHz
4. VSWR: 2.0:1
5. Cable: RG-174 1M
6. Connector: RP SMA (M) ST & SMA F Bulkhead

✘RoHS Compliant


✘ISO 9001 & ISO 14001

Cable	RG174/U(大噸)		<div style="border: 1px solid black; padding: 5px; font-weight: bold; font-size: 1.2em;">ROHS</div> <p>ISO 9001 ISO 14001</p>
OD	φ2.7±0.15mm		
Cover	Black (黒)		
RP SMA M	Gold (鍍金)		
SMA F(BH)	Gold (鍍金)		

Material:	Treatment:	竣茂工業有限公司 Chinmore Industry CO.,LTD			
Drawer	Design	Approv	Tolerance	Unit: mm	
<div style="border: 1px solid black; border-radius: 50%; padding: 5px; width: 30px; height: 30px; display: flex; align-items: center; justify-content: center;"> 機構 105.11.28 詹曉淵 </div>	<div style="border: 1px solid black; border-radius: 50%; padding: 5px; width: 30px; height: 30px; display: flex; align-items: center; justify-content: center;"> 工程 105.11.28 詹文華 </div>	X=±0.5		TITLE	
		X=±0.2		Ver: A	Scale 1:1
		X=±0.1		Model NO	RP SMA M+174U+SMA F(BH)
XXX=±0.05	File NO: QR0402	Drawing NO	100-23005-0295		

Frequency (MHz)	VSWR	Insertion Loss (dB)
600	1.09	-0.82
900	1.16	-1.05
1575	1.30	-1.49
1800	1.47	-1.76
2000	1.48	-1.87
2100	1.57	-2.01
2400	1.61	-2.28
2700	1.48	-2.49
3000	1.37	-2.57

Test Report

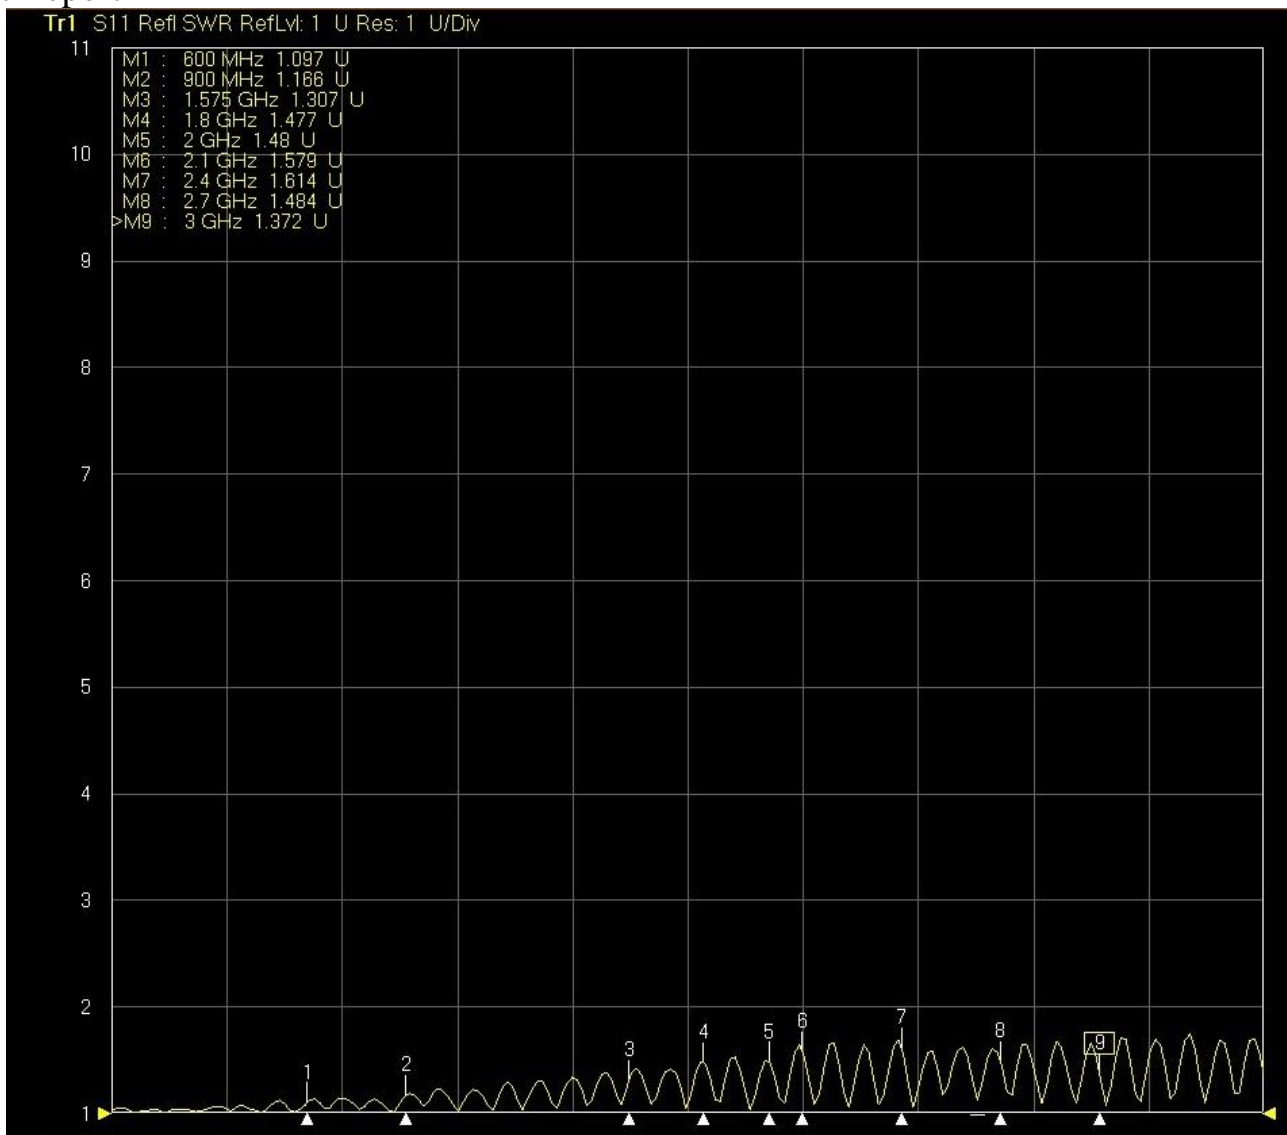

S12 Trans Load RefLvl: 0 dB Res: 10 dB/Div

