



CHINMORE INDUSTRY CO.,LTD

Specification


1. Cable Assembly with RF Connector
2. *Chinmore's* No: CX-SMA316NM0-1601
3. Frequency: 600MHZ~3GHz
4. VSWR: 2.0:1
5. Cable: RG316 350mm
6. Connector: RP SMA (M) ST & N M

✘RoHS Compliant

✘ISO 9001 & ISO 14001

Cable	RG316U
OD	∅2.5±0.1mm
Cover	Brown
SMA M RP	Ni(鍍層)
N M	Ni(鍍層)


ROHS
ISO 9001
ISO 14001

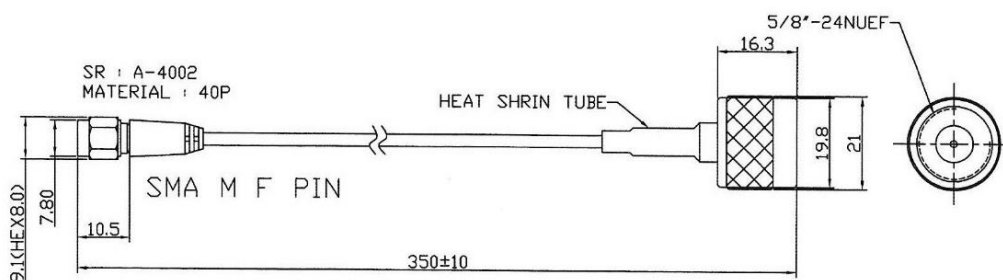

Material:	Treatment:	竣茂工業有限公司 Chinmore Industry CO.,LTD			
Drawer	Design	Approval	Tolerance	Unit:	TITLE
			X=±0.1	mm	NSMA M RP+RG316U+N M
NO	DESCRIPTION	MATERIAL	QTY	Ver: A	Scale 1:1
Part NO	CX-SMA316NM0-1601			File NO: QR0402	Model NO
				Drawing NO	100-23005-0264

Frequency (MHz)	VSWR	Insertion Loss (dB)
600	1.33	-0.35
900	1.49	-0.57
1575	1.57	-0.76
1800	1.49	-0.84
2000	1.70	-1.21
2100	1.36	-0.83
2400	1.33	-1.16
2700	1.45	-0.99
3000	1.70	-1.82

Test Report

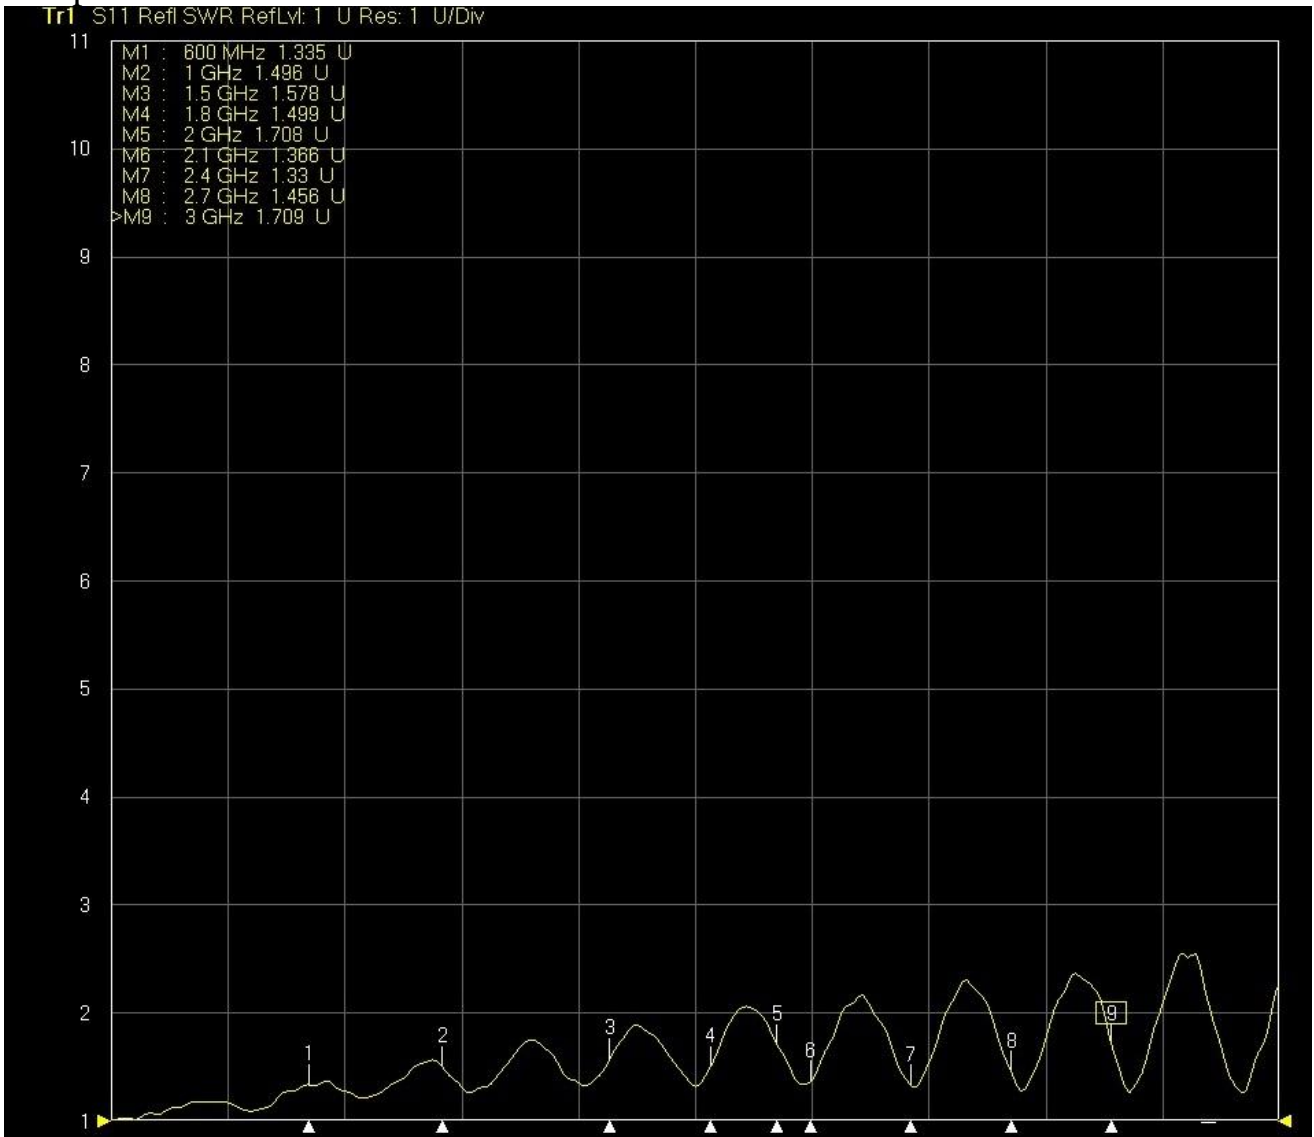

S21 Trans LogM RefLvl: 0 dB Res: 10 dB/Div

