



# CHINMORE INDUSTRY CO.,LTD

## Specification

1. Cable Assembly with RF Connector
2. *Chinmore's* No: CX-SMA174SMA-2201
3. Frequency: 600MHZ~3GHz
4. VSWR: 2.0:1
5. Cable: RG-174 300mm
6. Connector: RP SMA (M) ST & RP SMA F Bulkhead

✧RoHS Compliant

✧ISO 9001 & ISO 14001


Cable	RG174/UK(大脚)	<div style="border: 1px solid black; padding: 5px; display: inline-block;"> <b>ROHS</b>            ISO 9001            ISO 14001         </div>
OD	∅2.7±0.15mm	
Cover	Black (黒)	
RP SMA M	Gold (鍍金)	
RP SMA F(BH)	Gold (鍍金)	

Material:	Treatment:	竣茂工業有限公司 Chinmore Industry CO.,LTD			
Drawer	Design	Approv	Tolerance	Unit: mm	TITLE
機構	設計	工程	X=±0.5 Y=±0.2 Z=±0.1 XXX=±0.05	Ver: A	RP SMA M+174U+ RP SMA F(BH)
圖 1.8	圖 1.9	圖 1.10		Scale 1:1	Model NO
Part NO	CX-SMA174SMA-2201		File NO: QR0402	Drawing NO	100-23005-0314

Frequency (MHz)	VSWR	Insertion Loss (dB)
600	1.02	-0.26
900	1.08	-0.34
1575	1.31	-0.56
1800	1.56	-0.73
2000	1.19	-0.64
2100	1.47	-0.75
2400	1.19	-0.68
2700	1.50	-0.87
3000	2.00	-1.02

### Test Report

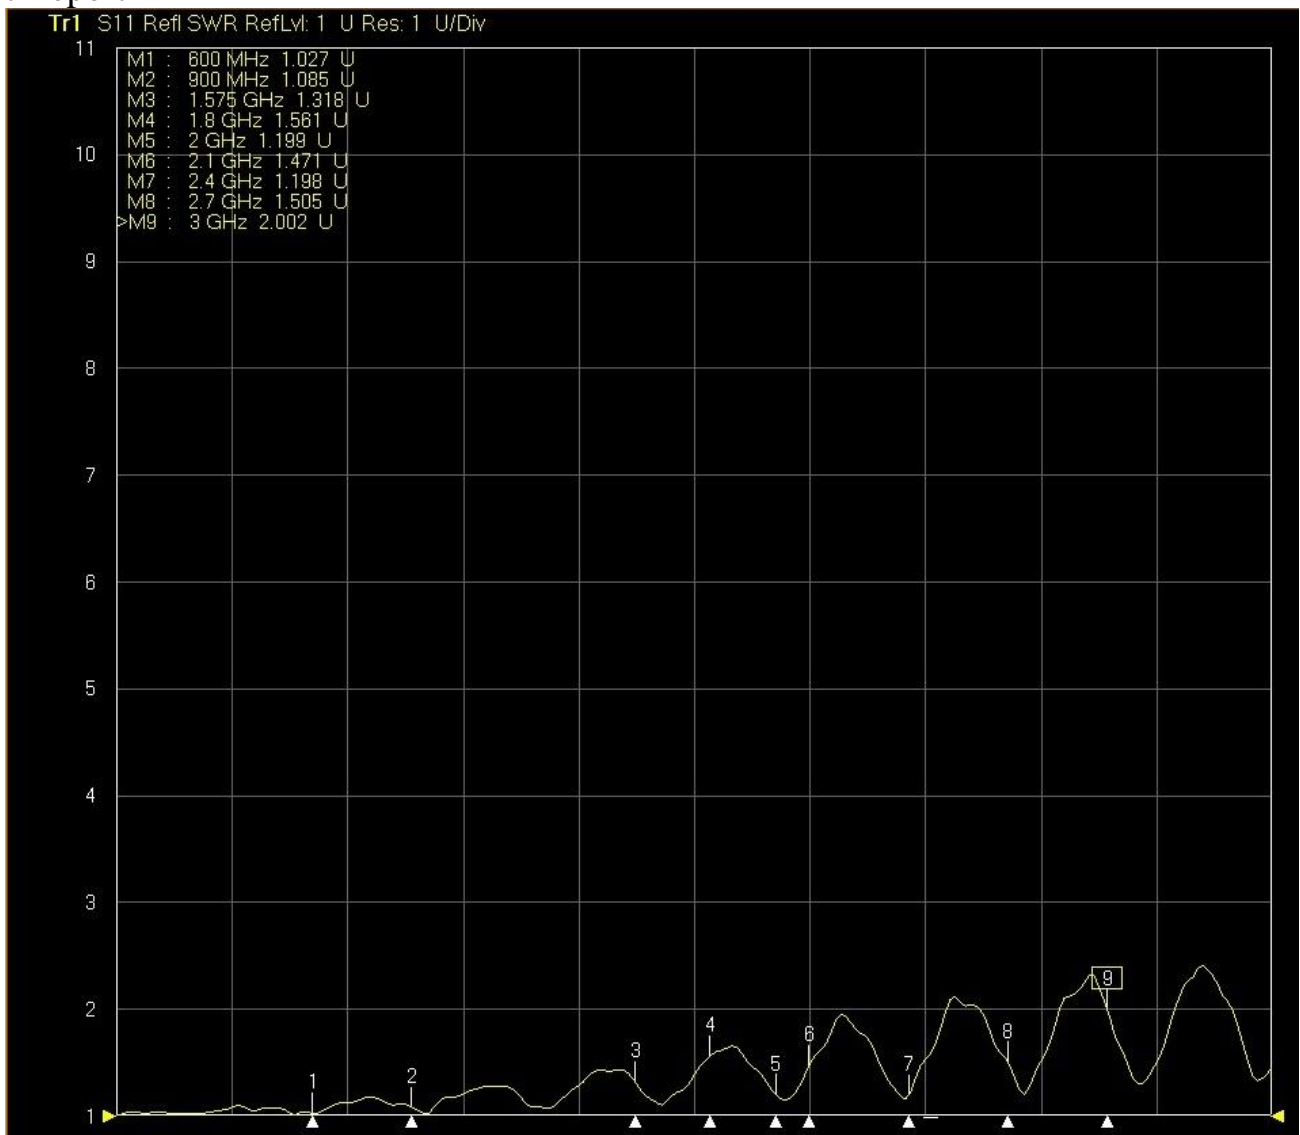

Tr2 S12 Trans LodM RefLvl: 0 dB Res: 10 dB/Div

