



# CHINMORE INDUSTRY CO.,LTD

## Specification

1. Cable Assembly with RF Connector
2. *Chinmore's* No: CX-SMA174SMA-1667
3. Frequency: 600MHZ~3GHZ
4. VSWR: 2.0:1
5. Cable: RG-174 5M
6. Connector: RP SMA (M) ST & RP SMA F Bulkhead

✧RoHS Compliant

✧ISO 9001 & ISO 14001


Cable	RG174/UC(大同)	<div style="border: 1px solid black; padding: 5px; display: inline-block;"> <b>ROHS</b>            ISO 9001            ISO 14001         </div>
OD	ø2.7±0.15mm	
Cover	Black (黒)	
RP SMA M	Gold (鍍金)	
RP SMA F(BH)	Gold (鍍金)	

Material:	Treatment:	竣茂工業有限公司 Chinmore Industry CO .LTD						
Drawer	Design	Approv	Tolerance	Unit:	mm		TITLE	RP SMA M+174U+ RP SMA F(BH)
Ver:	A	Scale	1:1	Model NO	WIREAC1865			
Part NO	CX-SMA174SMA-1667	File NO:	QR0402	Drawing NO	100-23005-0284			

Frequency (MHz)	VSWR	Insertion Loss (dB)
600	1.05	-3.61
900	1.09	-4.52
1575	1.18	-6.23
1800	1.29	-6.84
2000	1.21	-7.24
2100	1.35	-7.55
2400	1.42	-8.27
2700	1.36	-8.89
3000	1.37	-9.44

### Test Report

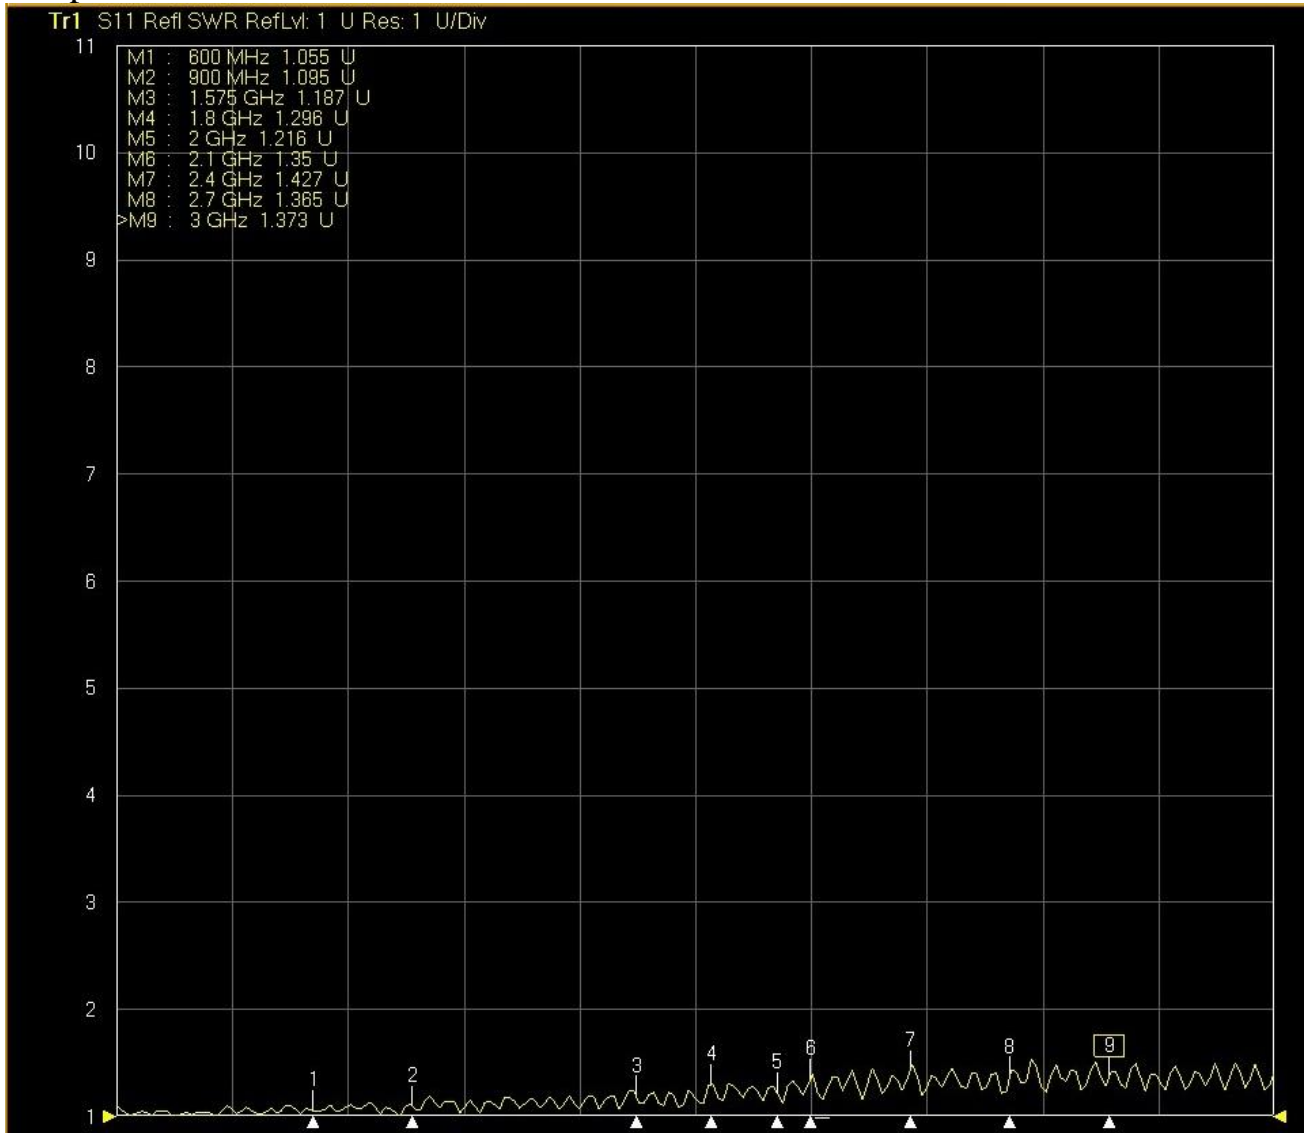

Tr2 S12 Trans LogM RefLvl: 0 dB Res: 10 dB/Div

