



# CHINMORE INDUSTRY CO.,LTD

## Specification

1. Mini Coaxial Cable Assembly with RF Connector
2. *Chinmore's* No: CX-IPX113SMA-1969
3. Frequency: 600MHZ~3GHz
4. VSWR: 2.0:1
5. Cable:  $\varnothing 1.13$
6. Connector: SMA F Bulkhead A Type

✧RoHS Compliant

✧ISO 9001 & ISO 14001

OD	$\varnothing 1.13 \pm 0.1 \text{mm}$	<div style="border: 1px solid black; padding: 5px; display: inline-block;"> <b>ROHS</b>            ISO 9001            ISO 14001         </div>
Cover	Grey (灰)	
SMA F(BH)A型	Gold (鍍金)	
I.PX 4	Gold (鍍金)	

I.PX 4


需鎖上防水圈 / 華司 / 螺母

ORING    WASHER    NUT

Material:		Treatment:		竣茂工業有限公司 Chinmore Industry CO .LTD			
Drawer	Design	Aprov	Tolerance	Unit:		TITLE	I.PX 4+1.13+SMA F(BH)A型
			X=±0.5 Y=±0.2 XX=±0.1 .XXX=±0.05	mm			
NO	DESCRIPTION	MATERIAL / FINISH	Q'TY	Ver:	Scale	Model NO	
Part NO	CX-IPX113SMA-1969			A	1:1		
				File NO:	QRO402	Drawing NO	100-23005-0323

Frequency (MHz)	VSWR	Insertion Loss (dB)
600	1.04	-0.75
1000	1.13	-1.07
1500	1.19	-1.52
1800	1.33	-1.80
2000	1.39	-2.16
2100	1.37	-2.20
2400	1.39	-2.77
2700	1.69	-3.07
3000	1.78	-2.45

### Test Report

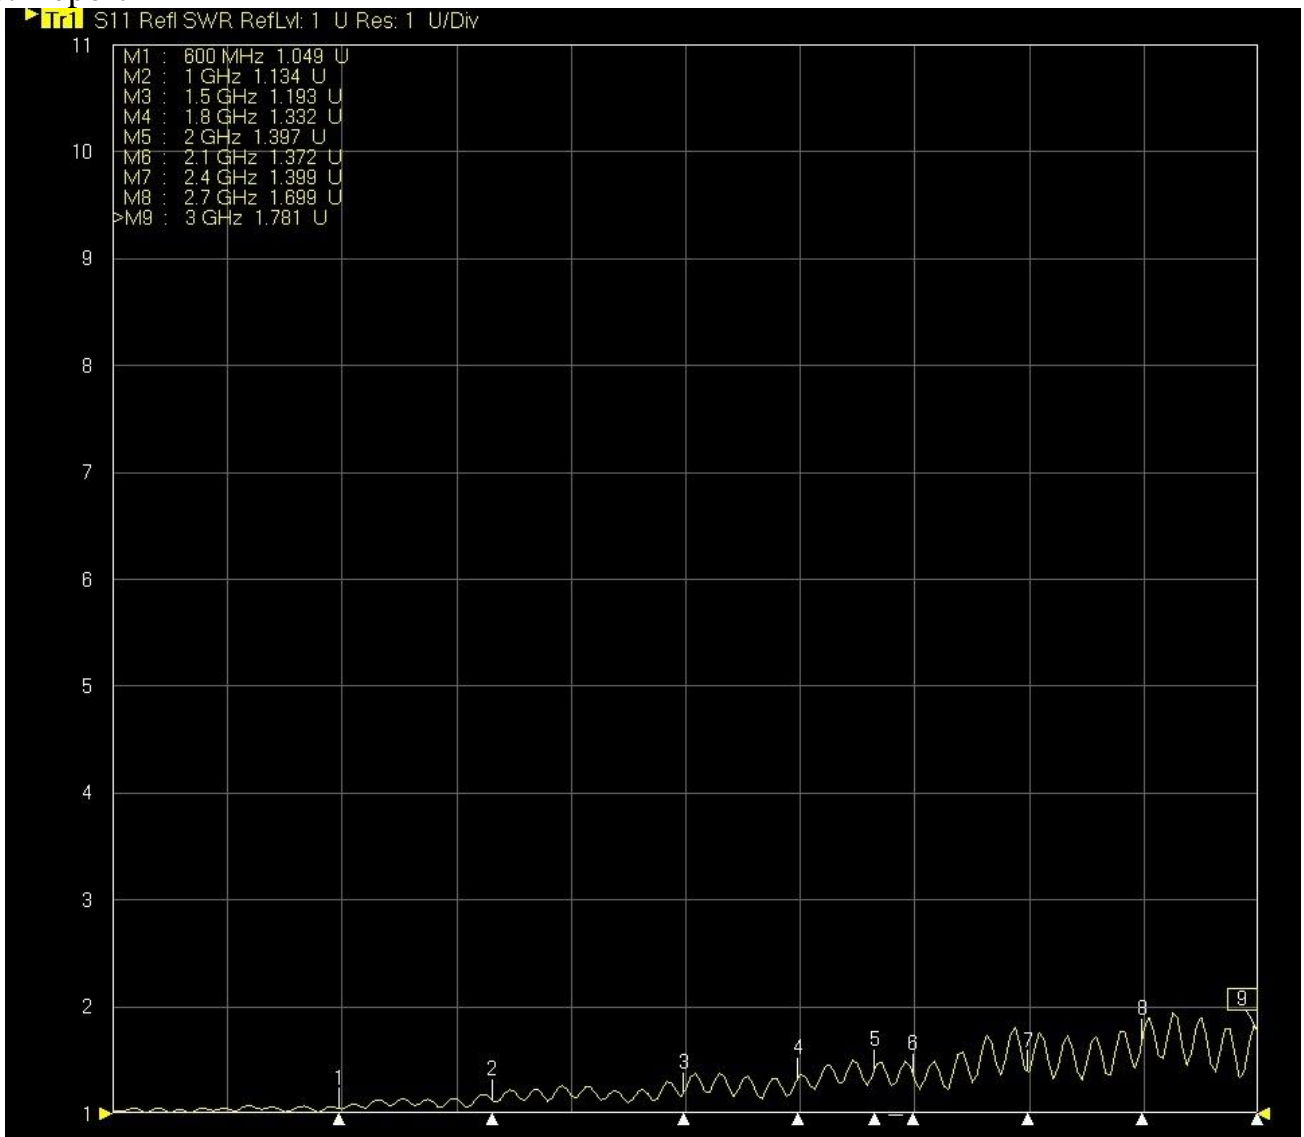

Tr2 S21 Trans Loss RefLvl: 0 dB Res: 10 dB/Div

