



# CHINMORE INDUSTRY CO.,LTD

## Specification

1. Cable Assembly with RF Connector
2. *Chinmore's* No: CX-MMCX174SMA-1724
3. Frequency: 1~3GHz
4. VSWR: 2.0:1
5. Cable: RG-174 250mm
6. Connector: SMA F Bulkhead & RA MMCX M

*✘RoHS Compliant*

*✘ISO 9001 & ISO 14001*

|           |             |   |
|-----------|-------------|---|
| Cable     | RG174/U     | <div style="border: 1px solid black; padding: 5px; display: inline-block;"> <b>ROHS</b><br/>           ISO 9001<br/>           ISO 14001         </div> |
| OD        | ∅2.7±0.15mm |   |
| Cover     | Black (黑)   |   |
| MMCX M RA | Gold (鍍金)   |   |
| SMA F(BH) | Gold (鍍金)   |   |


  

|                      |                 |                                    |                                 |
|----------------------|-----------------|------------------------------------|---------------------------------|
| Material:            | Treatment:      | 竣茂工業有限公司 Chinmore Industry CO .LTD |                                 |
| Drawer               | Design          | Aprov                              | Tolerance                       |
| 機排<br>04.11.20       | 工程<br>04.11.20  | 詹曉福                                | 蔡文基                             |
| Unit: mm             | Ver: A          | Scale 1:1                          | TITLE: MMCX M RA+174U+SMA F(BH) |
| Model NO: WIREAC1922 | File NO: QR0402 | Drawing NO: 100-23005-0287         |                                 |

| NO      | DESCRIPTION        | MATERIAL | FINISH | Q'TY |
|---------|--------------------|----------|--------|------|
| Part NO | CX-MMCX174SMA-1724 |          |        |      |

| Frequency (MHz) | VSWR | Insertion Loss (dB) |
|-----------------|------|---------------------|
| 1000            | 1.11 | -0.41               |
| 2000            | 1.40 | -0.82               |
| 3000            | 1.14 | -0.82               |

Test Report

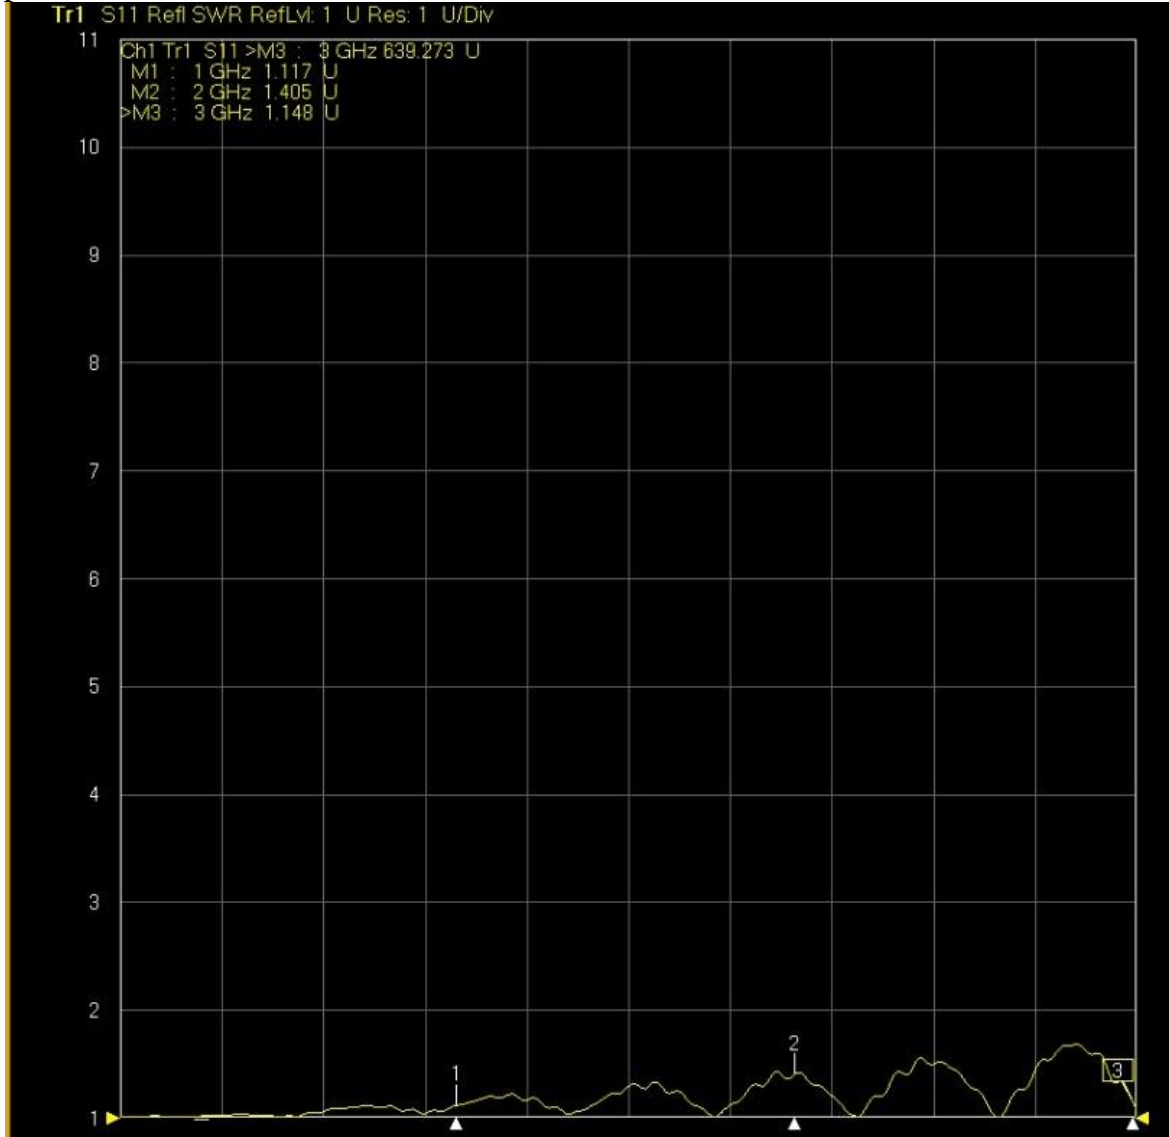

Tr2 S21 Trans LogM RefLvl: 0 dB Res: 10 dB/Div

