



CHINMORE INDUSTRY CO.,LTD

Specification

1. Cable Assembly with RF Connector
2. *Chinmore's* No: CX-SMA1354SMA-1848
3. Frequency: 600MHz~3GHz
4. VSWR: 1.8:1
5. Cable: 1354 5300mm
6. Connector: SMA (M) ST & SMA F(BH)

✧RoHS Compliant

✧ISO 9001 & ISO 14001

Cable	1354 (22#1C+AB)	注意線材規格	<div style="border: 1px solid black; padding: 5px; display: inline-block;"> ROHS ISO 9001 ISO 14001 </div>
OD	ø3.3±0.15mm	包裝方式 : 1Pcs一袋	
Cover	Black (黑)		
SMA M	Gold (鍍金)		
SMA F(BH)	Gold (鍍金)		


Technical drawing showing dimensions: 9.1 (HEX8.0), ø7.8, 10.5, 5300±50, HEAT SHRINK TUBE, HEAT SHRINK TUBE, ø8.0, 11.4, 14.8, ø5.4, ø10.5, 1/4"-36P.

Material:		Treatment:		竣茂工業有限公司 Chinmore Industry CO .LTD				
Drawer	Design	Aprov	Tolerance	Unit:	mm	TITLE	SMA F(BH)+1354(22#1C+AB)+SMA M	
				Ver:	A	Scale 1:1	Model NO	WIREAC2048
				File NO:	QR0402	Drawing NO	100-23005-0307	

NO	DESCRIPTION	MATERIAL / FINISH	QTY
Part NO	CX-SMA1354SMA-1848		

Frequency (MHz)	Return Loss (dB)	VSWR
600	-4.06	1.03
1000	-5.47	1.06
1500	-7.03	1.15
1800	-7.89	1.18
2000	-8.37	1.19
2100	-8.65	1.21
2400	-9.53	1.28
2700	-10.17	1.36
3000	-10.96	1.41

Test Data

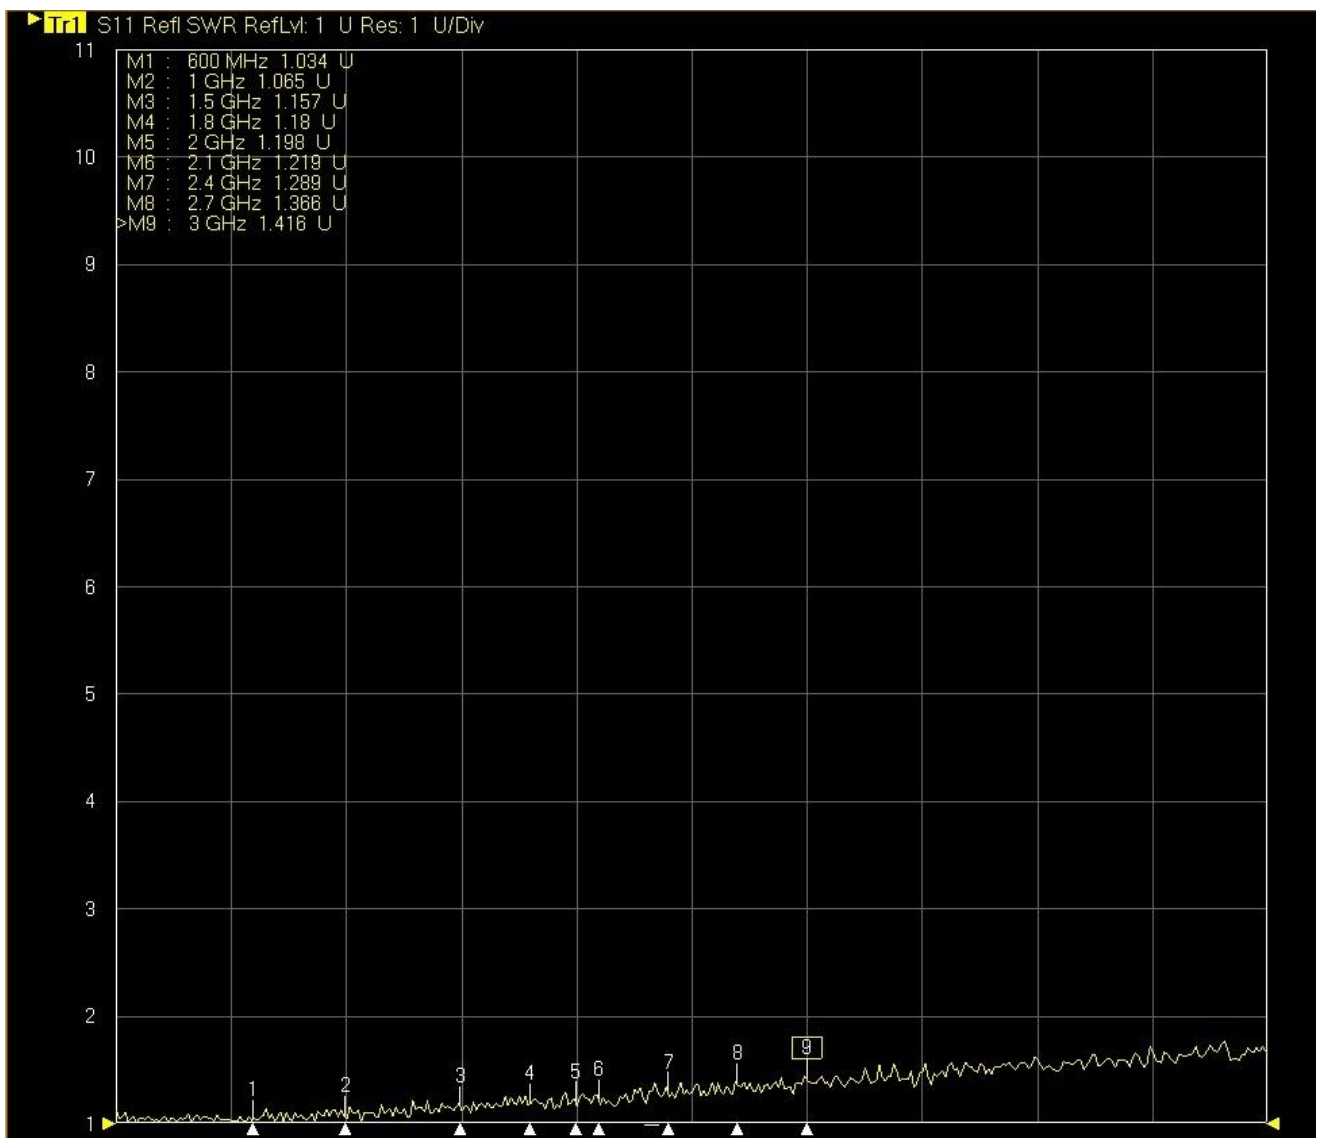

Tr2: S21 Trans LogM RefLvl: 0 dB Res: 10 dB/Div

